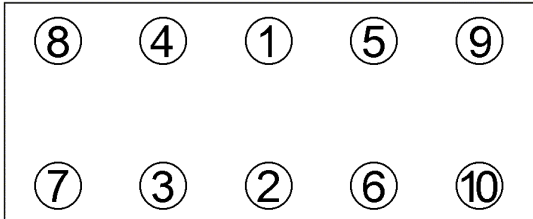


Anziehvorschrift für Zylinderkopf		984.275 passend für / suitable for adaptable à / adaptable a Renault	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
			
759.180 M 12 x 113			
Anziehen/ Tightening/ Serrage/ Apriete	* 30 Nm ➤ 80°±4° ● 3 min ☐ lösen/loosen desserrer/aflojar ➤ 25 Nm + 213°±7°		
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ ☐ ● ➤	neue Zylinderkopf- schrauben verwenden Wärmelauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor			
Ø: 81 mm; $\frac{1}{4}$: 1,85 mm; 3 Löcher/Holes/Trous			
Mot: F8Q 610, 620, 624, 640, 682, 706, 710, 714 722, 724, 730, 732, 742, 764, 774, 776			
1,9 Ltr. D; 44-48 kW (60-65 PS)			
R19, Clio, Megane, Rapid			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*984.275*	